



NAIL KNOTTER TOOL - 1115


Caution: When working with any tool, wear safety glasses.

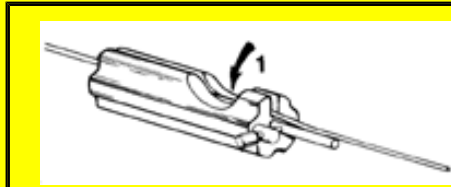


1) Hold line in place with thumb. Allow at least 15" of line in front of tool for winding.

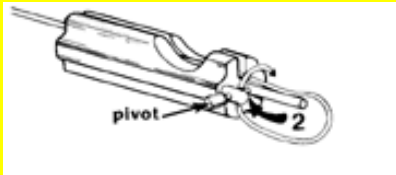


2) With pivot closed, form loop (approx. 2") and trap line behind pivot. Illustrated in Fig. 2.

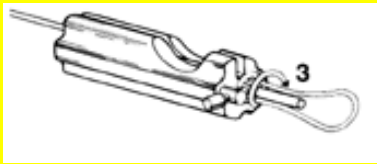

3) Wrap line around hollow post and loop line 6 to eight times. (Note: Hold series of winds in place with finger through step 4)

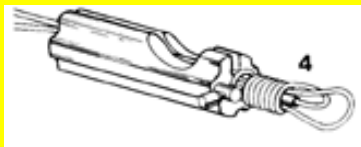

4) Feed end of line through hollow post and pull tight.

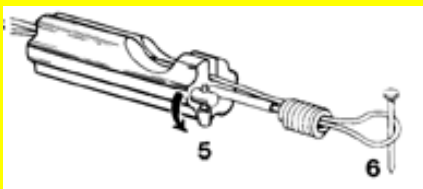

5) Turn pivot counter-clockwise, opening pivot to release line.

6) Hook loop over nail, boat cleat, or handle and, holding both ends of the line tight, slowly slip tool back until free of knot.

7) Pull both ends of line tight.

[Back to Fishing Instructions](#)